


Molecular Coding Format manual

Akira Yamaji

January 15, 2017

Located at <http://www.ctan.org/pkg/mcf2graph>

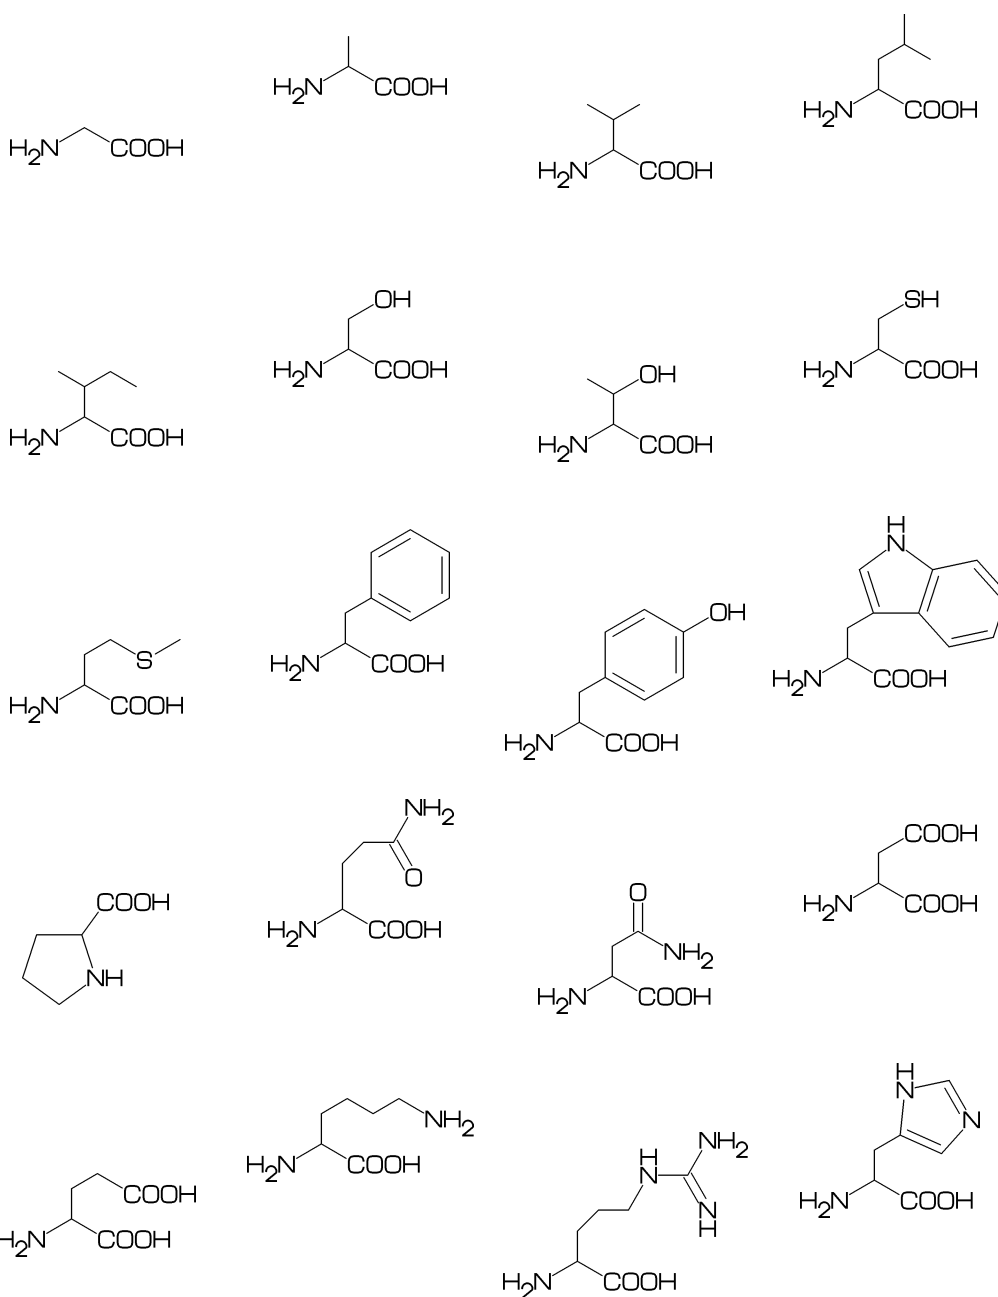

Contents

1	Introduction	3			
2	MCF syntax	3			
2.1	Make bond	3	3.1.7	Offset of wedge width	8
2.1.1	Chain	3	3.1.8	Max bond length	8
2.1.2	Jump and branch bond	3	3.2	Ratio parameter	8
2.1.3	Branch bond	3	3.2.1	Thickness/bond length	8
2.1.4	Connect atom	3	3.2.2	Char/bond thickness	8
2.1.5	Ring	3	3.2.3	Bondgap/bond length	8
2.1.6	Rotate current angle	3	3.2.4	Atom/bond length	8
2.2	Change bond type	4	3.2.5	Wedge/bond length	9
2.2.1	Double,triple	4	3.2.6	Font atom gap/atom length	9
2.2.2	Wedge	4	3.2.7	Chain/ring length	9
2.2.3	Vector	4	3.2.8	Zebra gap/bond length	9
2.2.4	Dotted,wave	4	3.3	Drawing mode	9
2.2.5	Broad	4	3.3.1	Numbering atom	9
2.2.6	Change multi bond type	4	3.3.2	Numbering bond	9
2.2.7	Over line	4	3.3.3	Clipping mode	9
2.3	Change bond length	4	3.3.4	Solid mode	9
2.3.1	Chain length	4	3.3.5	Expand mode	10
2.3.2	Ring length	4	3.3.6	Substituent off mode	10
2.4	Change atom	5	3.3.7	Single bond mode	10
2.4.1	Insert atom	5	3.4	Frame	10
2.4.2	Addressed atom	5	3.4.1	Font frame	10
2.4.3	Brock address	5	3.4.2	Molecular frame	10
2.4.4	Absolute address	5	3.4.3	Atom frame	10
2.4.5	Relative address	5	4	Function	10
2.5	Fuse ring	5	4.1	Function MCd()	10
2.5.1	Attached 1 bond	5	4.2	Function MCf()	10
2.5.2	Attached 2 bond	5	4.3	Function EXT()	11
2.5.3	Attached 3 bond	6	4.4	Function ext()	11
2.5.4	Attached 4 bond	6	4.5	Local parameter setting	11
2.5.5	Spiro ring	6	4.6	Global parameter setting	11
2.6	Substituent	6	5	Output information	11
2.6.1	Insert substituent	6	5.1	Output molecular information	11
2.6.2	Insert modified substituent	6	5.2	Output additional information	11
2.6.3	Add substituent	6	5.3	Change aux information delimiter	12
2.6.4	Add modified substituent	6	5.4	Fixed aux information	12
2.7	Chain environment	7	6	MCF example	12
2.7.1	Horizontal,vertical	7	6.1	Warfarin	12
2.7.2	Left-right,right-left	7	6.2	Limonin	12
2.7.3	Fixed angle,multi angle	7	6.3	Sesamine	12
2.8	Miscellaneous	7	6.4	Colchicine	12
2.8.1	Change atom and Substituent	7	6.5	Lycorine	13
2.8.2	Change color	7	6.6	Gibberellin	13
2.8.3	Make block	7	6.7	Quinine	13
2.8.4	Chain start multiple characters	7	6.8	Atoropin	13
2.8.5	User definition	7	6.9	Rotenone	13
2.8.6	Inline definition	7	6.10	Pyrethrin I	13
3	Option parameter	8	6.11	Validamycin	13
3.1	Size parameter	8	6.12	Paclitaxel	13
3.1.1	Font size	8	7	Example to use mcf2graph	14
3.1.2	Margin left and right	8	7.1	Molecular definition file	14
3.1.3	Margin top and bottom	8	7.2	Information auxfile output	14
3.1.4	Offset thickness of bond	8	7.3	Checklist output	15
3.1.5	Offset of doublebond gap	8	7.4	Molfile output	16
3.1.6	Offset of atom width	8	7.5	LuaTeX file example	17
			7.6	LaTeX file example	18

1 Introduction

Molecular Coding Format(MCF) is new linear notation represent chemical structure diagrams. This 'Coding' is named from coding(programing) technique like addressing,grouping,macro,etc. There are no Meta language commands in MCF. mcf2graph.m convert MCF file to graphics file pk font,PNG,SVG,EPS or MDL MOL file(V2000).


2 MCF syntax

2.1 Make bond

2.1.1 Chain


real number plus (+): anticlockwise
real number minus(-): clockwise

<30,-60,60,-90,120,-90,60

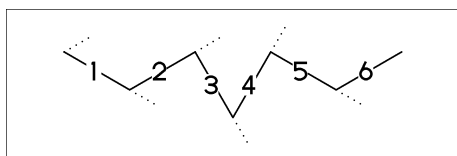

! : take value 60 or -60 depend on
current angle and enviroment
!6 : !,!,!,!,!,!,!


<30,! ,! ,! ,! ,! ,!
<30,!6

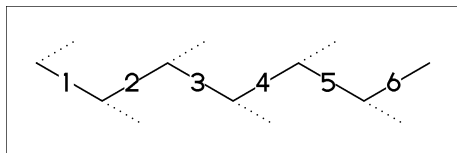

2.1.2 Jump and branch bond


n* : Jump to An
** An: atom number(-999<=n<=4095)

<30,!6,3*,0,! ,5*,-30



3\ : 3*,0


<30,!6,3\,! ,



2.1.3 Branch bond


2\ : 2*,0
4*\ : 4*,0~wf
6* : 6*,0~zf
8\\ : 8*,0~dm

<30,!8,2\,! ,4*\,! ,6*,! ,8\\,! ,

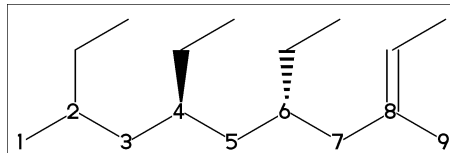

2\~dr : 2*,0~dr
4\'1.5 : 4*,0\'1.5
6\^15 : 6*,0^15


<-30,!6,
2\~dr,! ,
4\'1.5,-90,
6\^15,-60



2.1.4 Connect atom


&n : Connect to An

<30,!6,3\,! ,&5



2.1.5 Ring


?n : n membered ring(3<=n<=20)
?6 : <-120,60,60,60,60,60,&1
?6



2.1.6 Rotate current angle

<angle : rotate current angle

0,0,<90,0,<-90,0,0,\$(1,2,3,4,5)vf




2.2 Change bond type

2.2.1 Double, triple

a~type : ~type,a
dm : double middle
dl : double left side
dr : double right side
db : double left or right side
tm : triple
!! : !~db / !!! : !~tm


<30,!~dm,!~dl,!~dr,!~db,!~db,!~tm
<30,!~dm,!~dl,!~dr,!! ,!! ,!!



2.2.2 Wedge

wf : wedge forward / wb : wedge backward
zf : wedge dotted
zb : wedge dotted backward


<30,!~wf,!~wb,!~zf,!~zb



2.2.3 Vector

vf:vector forward / vb:vector backward


<30,!~vf,!~vb



2.2.4 Dotted, wave

Bn=bond type : change bond type at Bn
dt : dotted / ww : wave


<30,!3,1=dt,3=ww



2.2.5 Broad

bd : broad / bz : broad dotted


<30,!3,1=bd,3=bz



2.2.6 Change multi bond type

\$(2,4,6)dr : 2=dr,4=dr,6=dr


<30,!7,\$(2,4,6)dr



2.2.7 Over line

si_ : single over line
wf_ : wedge forward over line
wb_ : wedge backward over line
bd_ : broad over line

<-30,!8,!60,90'8,
@(2~si_,4~wf_,6~wb_,8~bd_)/_ '2

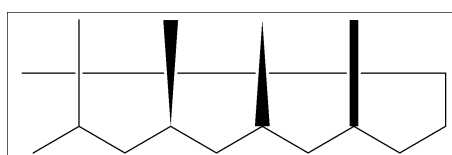


2.3 Change bond length

2.3.1 Chain length

(!,!n)'length : change length of !,!n


<30,!2,!2'1.2,!2

** !2'1.2 : ''1.2,!2



''length : change all bond length after


<30,!2, ''1.2,!4



2.3.2 Ring length

?n'length : change ring length

?6,4\,?6'1.2




2.4 Change atom

2.4.1 Insert atom

Insert hetero atom

<30,!2,0,!2,N,!2




2.4.2 Addressed atom

2:0 : change A2 C to O

@(3,5)N : change A3,A5 C to N


<30,!6,2:0,@(3,5)N



2.4.3 Brock address


| : divide brock

?6,4\,|,?6,2:0



|| : reset brock address

?6,4\,|,?6,||,2:N




2.4.4 Absolute address

#2:N : change A#2 C to N

** #n : (1<n<=3095)

?6,4\,|,?6,#2:N




2.4.5 Relative address

-2:N : change A(-2) C to N

** -n : (1<n<=999)

?6,4\,?6,-2:N




2.5 Fuse ring

2.5.1 Attached 1 bond

?6,3=?6 : fuse ?6 at B3


** Bn(n:-999<=n<=4095): bond number

?6,3=?6



** fused ring size depend on attached bond length

?6,4\,?6'1.2,5=?6,11=?6




?6,3=?6[13] : fuse ?6[13] at B3

?6[13]: 6 membered ring scaled 13/10


** ?m[n] (5<=m<=8,11<=n<=15)

?6,3=?6[13]



?6,\$(-3,-4,-4,-2,-2,-4,-4)?6

?6,\$(4,8,13,20,25,28,33)?6

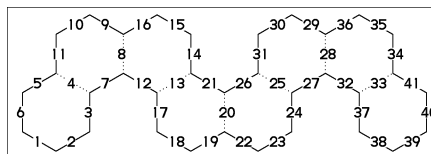

2.5.2 Attached 2 bond

(4,11)=?6[4] : fuse 4/6 ring to B11..B4

(4,11)=?5[3] : fuse 3/5 ring to B11..B4


(4,11)=?4[2] : fuse 2/4 ring to B11..B4

** ?m[n] (4<=m<=6,n=m-2)

1:MCd(1,.7)(0,0)(<30,?6,3=?6,(11,4)=?6[4])

2:MCd(1,.6)(.54,1)(<30,?6,3=?6,(11,4)=?5[3])


3:MCd(1,.6)(1,0)(<30,?6,3=?6,(11,4)=?4[2])

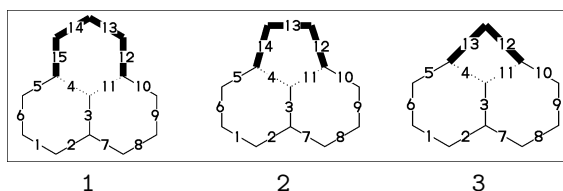

2.5.3 Attached 3 bond

(16,4)=?6[3] : fuse 3/6 ring to B16..B4
 (16,4)=?5[2] : fuse 2/5 ring to B16..B4
 ** ?m[n] (5<=m<=6,n=m-3)

1:MCd(1,.55)(0,0)(?6,\$(3,10)?6,(16,4)=?6[3])
 2:MCd(1,.55)(1,0)(?6,\$(3,10)?6,(16,4)=?5[2])

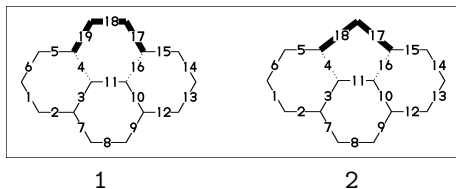


2.5.4 Attached 4 bond

(21,4)=?6[2] : fuse 2/6 ring to B21..B4

MCf(<-30,?6,\$(3,10,15)?6,(21,4)=?6[2])

** ?m[n] (m=6,n=2)




2.5.5 Spiro ring

4*,?5 : add ?5(5 membered ring) at A4

<30,!6,4*,?5

An* : jump to An




2.6 Substituent

2.6.1 Insert substituent

/ : single

<30,!/,Me,!,/Et,!3,/Pr,!,/iPr,
 !3,/tBu,!,/Ph^-30,!

** Me:methyl(/_) Et:ethyl(/!)
 Pr:propyl(/!2) iPr:isopropyl
 tBu:tertial buthyl Ph:phenyl

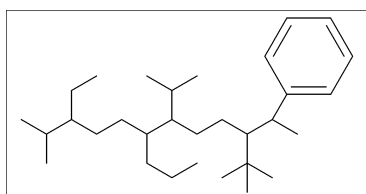

2.6.2 Insert modified substituent


// : double (double middle)

*/ : wedge forward

/* : wedge dotted forward

** : direct

<30,!/,/0,!,/*H,!,*/H,!,/?3,!,**?3,!

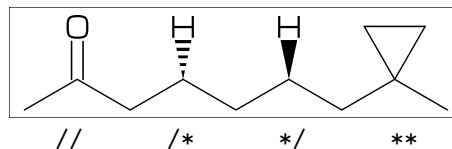


~ : change type

^ : change angle

' : change length


> : change enviroment

<30,'^1,!,/_~zf'^2^30,
 !2,*/!2>lr,!2,*/!2>r1,!)



2.6.3 Add substituent

<-30,!17,2:/_,4:/!,6:/!2,
 10:/iPr,14:/tBu,16:/Ph^-60




2.6.4 Add modified substituent

~,^,' : change type,angle,length

<-30,!6,


@(2~wf,4~zf,6^-30)/_



~,^,'> : change angle,length,environment

<30,!7^1,

3:/*_^2^30,5:/!2>lr,7:/!2>r1




2.7 Chain environment

2.7.1 Horizontal,vertical

>hz : horizontal environment (default)
>vt : vertical environment


```
?4,@(3^-90,3^-30,3^90)/'(!3,"{hz}")>hz,  
  @(1^-60,1'^2,1^60)/'(!2,"{vt}")>vt
```



2.7.2 Left-right,right-left

>lr : left-right environment
>rl : right-left environment


```
<30,!6,  
  @(3^-30,3,3^30)/'(!3,"{lr}")>lr,  
  @(5^-30,5,5^30)/'(!3,"{rl}")>rl
```

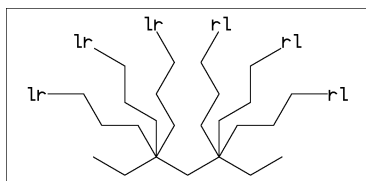

2.7.3 Fixed angle,multi angle

>45 : fixed angle environment
>'(-90,90,-90) : multi angle environment

```
<-30,!6,@(2>45)/'(!3,"{45}")  
  @(6>'(-90,90,-90))/'(!3,"{(-90,90,-90)}")
```




2.8 Miscellaneous

2.8.1 Change atom and Substituent

NH,S0,S00 :
 inset hetero atom and substituent
 simultaneously


```
<30,!2,NH,! ,S0,! ,S00,!3
```



2.8.2 Change color

@(5)green : change color of A5 green
\$(3)red : change color of B3 red
** METAFONT ignore color command


```
<30,Ph,@(2,5)N,2:red,5:blue,3=green
```



2.8.3 Make block

{ : start block
} : end block


```
<30,!2,{,'1.2,!2,!2
```




2.8.4 Chain start multiple characters

if chain start multi character string,
use !0 instead of !

```
MCf(<30,COOH,!0,!3,COOH)
```




```
MCf(<30,COOH,!4,COOH)
```



2.8.5 User definition

iBuOH : user defined substructure


```
iBuOH:= '(!,/_,!,OH)  
MCf(<30,!6,@(4,6)/iBuOH)
```



2.8.6 Inline definition

Insert user defined substructure

```
<30,!3,/ '(!,/_,!,OH),!3
```




3 Option parameter

3.1 Size parameter


3.1.1 Font size

```
beginfont("EN:Caffeine")  
font_wd#:=30mm#; %<=font width  
font_ht#:=20mm#; %<=font height  
MCf(<30,?6,-4=?5,$(3,8)d1,@(2,6,7,9)N,  
    @(2,6,9)/_,@(1,5)//0) endfont
```




3.1.2 Margin left and right

default: margin_left_right=0.4mm

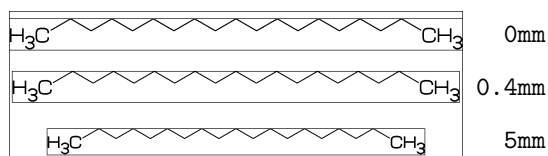


3.1.3 Margin top and bottom

default: margin_top_bottom=0.4mm

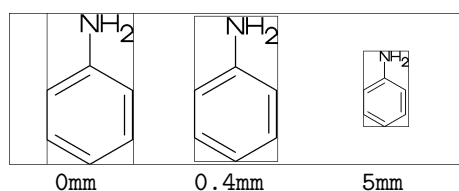


3.1.4 Offset thickness of bond

default: offset_thickness#=0.2pt#




3.1.5 Offset of doublebond gap

default: offset_bond_gap#=0.3pt#




3.1.6 Offset of atom width

default: offset_atom#=0.8pt#

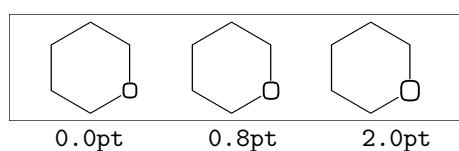


3.1.7 Offset of wedge width

default: offset_wedge#=0.4pt#

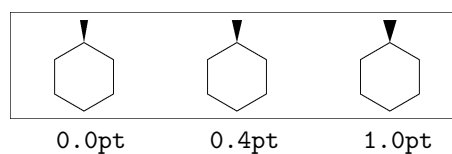

3.1.8 Max bond length


default: max_bond_length#=10mm#

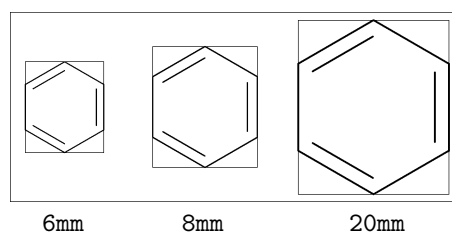

3.2 Ratio parameter


3.2.1 Thickness/bond length

default: ratio_thickness_bond=0.015




3.2.2 Char/bond thickness

default: ratio_char_bond=1.5

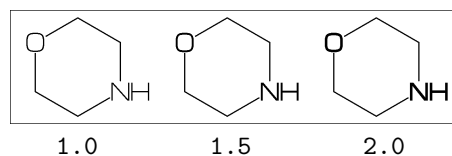


3.2.3 Bondgap/bond length

default: ratio_bondgap_bond= 0.15




3.2.4 Atom/bond length

default: ratio_atom_bond= 0.36

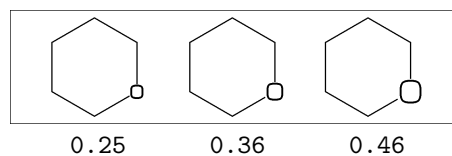


3.2.5 Wedge/bond length

default: ratio_wedge_bond=0.12

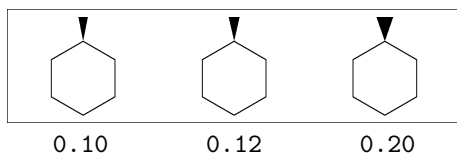


3.2.6 Font atom gap/atom length

default: ratio_atomgap_atom= 0.050




3.2.7 Chain/ring length

default: ratio_chain_ring= 0.66

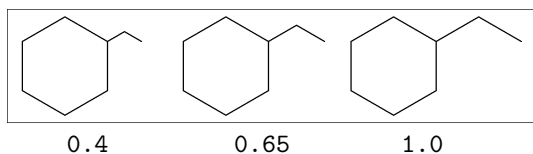

3.2.8 Zebra gap/bond length


default: ratio_zebragap_bond=0.12

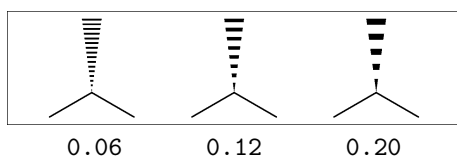

3.3 Drawing mode


3.3.1 Numbering atom

numberA_start:=3; numberA_end:=8;
default: sw_numberA=0 :
 numberA_start=1 numberA_end=4095

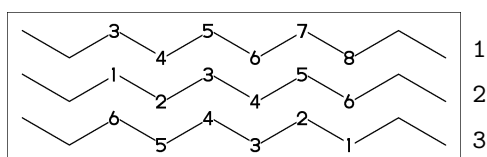


3.3.2 Numbering bond

numberB_start:=3; numberB_end:=8;
default: sw_numberB=0 :
 numberB_start=1 numberB_end=4095

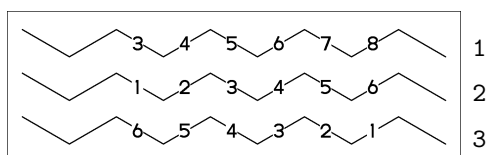

3.3.3 Clipping mode

sw_clip:=0;
MCd(1,0.7)(0.2,0.3)(Ph)
MCd(1,0.7)(0.8,0.7)(Ph)
** default: sw_clip=0




sw_clip:=1;
MCd(1,0.7)(0.2,0.3)(Ph)
MCd(1,0.7)(0.8,0.7)(Ph)




3.3.4 Solid mode


(fit to font size)
sw_solid=0 ** default




(solid ratio bond/font width)
sw_solid:=1;
ratio_bond_width=0.1
font_width=60mm
(bond_len#=60mm#*0.1=6mm#)
** ignore bond_len#



(solid bond length)
sw_solid:=2;
bond_len#=10mm#
** ignore ratio_bond_width

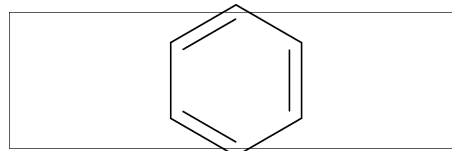


(solid bond length and clip)
sw_solid:=2;
sw_clip:=1;
bond_len#=10mm#



3.3.5 Expand mode

default: sw_expand=0

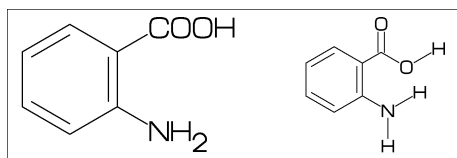


0 :default

1

3.3.6 Substituent off mode

default: sw_subst_off=0




0 :default

1

3.3.7 Single bond mode

default: sw_bond_single=0



0 :default


1

3.4 Frame

3.4.1 Font frame


(Draw font frame)

```
margin_left_right:=5mm;  
margin_top_bottom:=2mm;  
sw_font_frame:=1;  
MCf(<30,Ph,4:/Cl,3:/F)
```




(Draw frame inside margin)

sw_font_frame=2




(Draw both frame)

sw_font_frame=3




3.4.2 Molecular frame

```
sw_mol_frame:=1;  
MCd(1,.5)(1,0.5)(<30,Ph,4:/Cl,3:/F)  
** default: sw_mol_frame=0
```



3.4.3 Atom frame

```
sw_atom_frame:=1;  
MCf(<30,Ph,1:/Cl,4:/COOH,3:/OH)  
** default: sw_atom_frame=0
```



4 Function

4.1 Function MCd()

(Draw molecular structure)


MCd(a,b)(c,d)(...)

a: ratio molecular width/font width
b: ratio molecular height/font height
c: x axis position
d: y axis position

beginfont()

```
MCd(1,0.8)(0.2,0.9)(<30,Ph,3:/F,4:/Cl)  
MCd(1,0.8)(0.8,0.1)(<30,Ph,3:/F,4:/Cl)
```

endfont

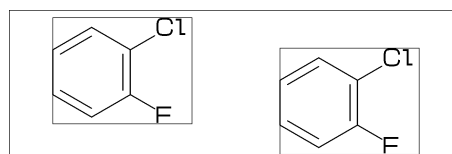

4.2 Function MCf()

(Draw molecular fit to font size)



MCf(...) : MCd(1,1)(0.5,0.5)(...)

beginfont()

```
font_wd#:=25mm#;  
font_ht#:=15mm#;  
MCf(<30,Ph)  
endfont
```

beginfont()

```
font_wd#:=13mm#;  
font_ht#:=25mm#;  
MCf(<30,Ph)  
endfont
```




4.3 Function EXT()

(Extra graphic to font)

```
w: font width
h: font height
wd: font width-margin_left_right*2
ht: font height-margin_top_bottom*2
p0: x=margin_left_right
    y=margin_top_bottom
n: molecular number
p[m]: molecular origin position
    (1<=m<=molecular count)
```

```
beginfont()
sw_mol_frame:=1;
MCD(1,0.8)(0.1,0.5)(<30,Ph,2:/OH,5:/OH)
MCD(1,0.8)(0.9,0.5)
    (<30,?6,$(3,6)d1,@(2,5)//0)
EXT(
draw ((0,0)--(25mm,0)--(21mm,2mm))
    shifted (0.3w,0.5h);
drawdot p0 withpen pencircle scaled 2mm;
drawdot p1 withpen pensquare scaled 2mm;
drawdot p2 withpen pensquare scaled 2mm;
)
endfont
```

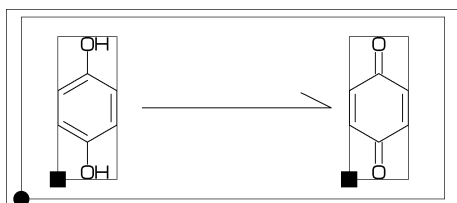


4.4 Function ext()

(Extra graphic to molecule)


```
wd: molecular width
ht: molecular height
p0: origin of molecular structure
n: atom number
l: bond length
p[m]: atom position of A[m]
a[m]: branch angle of A[m]
    (1<=m<=atom count)
draw_vector(position,angle,length)
```

```
beginfont()
MCF(<30,Ph,3:/F,4:/Cl)
ext(draw p0--(p0+(wd,0))
    --(p0+(wd,ht));
    draw_vector(p6,a6-180,1);
)
endfont
```

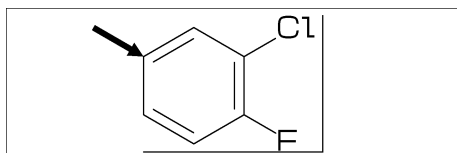


4.5 Local parameter setting

```
beginfont() MCF(Ph) endfont
beginfont()
    ratio_thickness_bond:=0.05;
    MCF(Ph)
endfont
beginfont() MCF(Ph) endfont
```



4.6 Global parameter setting

```
beginfont() MCF(Ph) endfont
ratio_thickness_bond:=0.05;
beginfont() MCF(Ph) endfont
beginfont() MCF(Ph) endfont
```




5 Output information

5.1 Output molecular information

```
var3:="calc_weight"; tag3:="cMW";
var4:="calc_formula"; tag4:="cFM";
%% Output to mcf_man_soc-info.aux %%
..... ;C:85;cMW:194.19174;cFM:C8H10N4O2
```

cMW:calculated molecular weight
cFM:calculated molecular formula




5.2 Output additional information

```
beginfont("EN:Tocopherol","CAS:59-02-9")
MCF(<30,Ph,3=?6,
    7:0,@(1,2,5)/_8:/*_~60,6:/OH,
    8\,|,!12,@(4,8)/*_12:/_)
endfont

%% Output to mcf_man_soc-info.aux %%
F:mcf_man_soc;C:86;EN:Tocopherol;CAS:59-02-9
.....

*F:filename *C:char number EN:molecular name
CAS:CAS number *:default output
```




5.3 Change aux information delimiter

```
aux_delimiter=" / ";
beginfont("EN:Ampicillin", "CAS:69-53-4")
  MCF(<45,?4,2:N,2=?5,-1:S,
    @(3^45,4^-45)/*H,1://0^15,
    5:/*COOH^-18,@(6^35,6^-35)/_,
    4*^75,NH,!,//0,!/*NH2,! ,Ph)
endfont
beginfont(.....)
  .....
endfont
  .....

%% Output to mcf_man_soc-info.aux %%
F:mcf_man_soc/C:90/EN:Ampicillin/CAS:69-53-4
  .....
```


```
**default aux_delimiter=" / ";
```



5.4 Fixed aux information

```
tag3="NO"; var3="inf_NO";
tag4="EN"; var4="inf_EN";
sw_auxfix:=1; auxtag_out;
beginfont("EN:Cholesterol", "NO:1")
  MCF(<30,?6,$(-4,-2)?6,-4=?5,7=d1,
    1:*/OH,@(4,12)*/_^60,9:*/H^60,
    10:/*H^180,11:/*H^-60,17:/*H^-54,
    -1\^18,/*_,-60,!3,/_,!)
endfont
beginfont(.....)
  .....
endfont
  .....
```


```
%% Output to mcf_man_soc-info.aux %%
F;C;NO;EN
mcf_man_soc;91;1;Ampicillin
  .....
```



6 MCF example


6.1 Warfarin

```
<30,Ph,3=?6,8=d1,
10:0,7:/OH,9://0,
8\,/Ph'1,60,! ,//0,!
```




6.2 Limonin

```
<30,?6,$(-3,-4)?6,-5=?3,
-2=wf,-1=wb,6=?5,-4=?6,-5=wf,
@(13,15,17,20)0,@(3,12,21)//0,
@(4~wf^60,8~zf^60,18^35,18^-35)/_,
@(1^60,5^180,16^60)/*H,
14\*,|,?5,$(1,4)d1,3:0
```




6.3 Sesamine

```
<54,?5,1=?5,
@(4,7)0,@(1^-54,2^54)*H,
#5*^~12,Ph,|,-3=?5,@(-1,-3)0,
#8*^~12,Ph,|,-3=?5,@(-1,-3)0
```




6.4 Colchicine

```
<30,Ph,@(1,2,6)/O!,
-4=?7,-5=?7,
$(-1,-4,-6)d1,-2://0,-3:/O!,
9\,NH,! ,//0,!
```




6.5 Lycorine

<30,Ph,
-4=?6,-2=?6,6=?5,(9,12)=?5[3],
13=d1,
8:N,@(15,17)O,
9:/*H^180,10:*/H^60,
13:*/OH,14:/*OMe




6.6 Gibberellin

<18,?5,3=?7,5=?6[12],
8*,160'1.3,&3,
13=d1,6=wf,8=wb,
5*,40~zf'1,0,60,//0^180,&14~zb,
2:/COOH,7://_,13:*/OH,8:*/OH,
14:*/_,@(1^60,4^60)*/H




6.7 Quinine

<30,Ph,3=Ph,7:N,6:/O!,
10\,*/OH,/H~zf^-60,!,
|,?6,2:N,1:*/H^60,
4*\,!!,
2*,165~zf,60,&5~zb




6.8 Atoropin

<-30,0,!,//0,!,!,Ph,
#1~zb^-120,
|,?7,6*\^190'1.02,N,/_,&3~wb,
#3~wv,!,OH

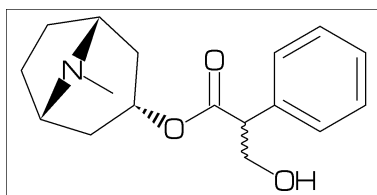


6.9 Rotenone

<-60,?5,\$(-3,-2,-3,-4)?6,
\$(7,9,-2,-4)d1,\$(3,17)dr,
@(2,13,16)O,10:/O, @(11^-60,12^60)*/H,
@(-2,-3)/O!,1*\,/_,!!




6.10 Pyrethrin I

<30,?3,@(3^35~wf,3^-35~zf)/_,
1*\,!!iPr,2*,//0,!,0,-36~zb,|,
?5,-2=d,-1:/_,-3:/O,-2\,!4,\$(-1,-3)d1

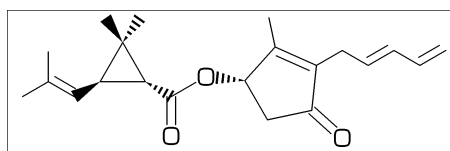


6.11 Validamycin

<30,?6,@(5,6)/OH,3:/!OH>r1,
#4\,0,-60,|,?6,2:O, @(3,4,5)/OH,6:/!OH,
#1\,NH,!,|,?6,2=d1,@(4,5,6)/OH,3:/!OH

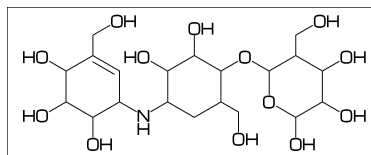

6.12 Paclitaxel

?6,5=d,3*{,' '1,36,45,45,45,45,},
-4=?6,-4=?4,-1=wb,-3=wf,-1:O,||,
@(4^35,4^-35,6)/_,@(3^-60,15)*/OH,
8:/*H^-60,9:*/_ ^60,10:/O,
1\,0,!,//0,!,*/OH,!,/Ph,
60~wf,NH,-60,//0,60,Ph,
7*,0,-45,//0,60,Ph,11*\,0,-60,//0,60,
12*^-15,0,60,//0,-60



7 Example to use mcf2graph

7.1 Molecular definition file

```
%-----
input mcf2graph.mf;                                % input macro
%-----
sw_auxout:=1;          % aux(information) file output on > Gloval setting
font_wd#:=60mm#;       % font width                  >
font_ht#:=40mm#;       % font height                 >
var3:="cal_MW"; tag3:="cMW";                          > AUX file table
var4:="cal_FM"; tag4:="cFM";                          >
outputformat:="png"; hppp:=vppp:=0.1;                 > PNG output
outputtemplate:="%j-%3c.png";                        >
%-----
beginfont("NO:1","EN:Ampicillin")                    > begin font(information)
  MCF(<45,?4,2:N,2=?5,-1:S,                          > begin MCF (1)
    @(3^45,4^-45)/H,1://0^15,5:/*COOH^-18,            >
    @(6^35,6^-35)/_,                                  >
    4\^75,NH,!,//0,!/*NH,! ,Ph)                     > end MCF
endfont                                                > end font
%-----
beginfont("NO:2","EN:Cholesterol")                    > begin font(information)
  MCF(<30,?6,$(-4,-2)?6,-4=?5,7=d1,                  > begin MCF (2)
    1:*/OH,@(4,12)*/_^60,9:*/H^60,                   >
    10:/*H^180,@(11,-1)/*H^-60,                     >
    -1\^17,/*_,!4,/_,!))                             > end MCF
endfont                                                > end font
%-----
bye
```

7.2 Information auxfile output

(Insert option parameter setting)

```
sw_auxout:=1;
** default : sw_auxout=0
```

(Command line)

```
>mpost -s ahandle=0 FILENAME (molecular definition file)
```

(Output)

(sw_auxfix=0)

```
F:mcf_man_soc;C:109;cMW:349.40462;cFM:C16H19N3O4S;EN:Ampicillin
F:mcf_man_soc;C:110;cMW:386.6532;cFM:C27H46O;EN:Cholesterol
.....
.....
```

(sw_auxfix=1)

```
F;C;cMW;cFM;EN
mcf_man_soc;90;349.40462;C16H19N3O4S;Ampicillin
mcf_man_soc;91;386.6532;C27H46O;Cholesterol
.....
.....
```

(tag : variable)

```
F : filename      C : char number    NO : serial number   EN : english name
cMW : molecular weight calculated    cFM : molecular formula calculated
MW  : molecular weight from literature data
```

7.3 Checklist output

(Insert option parameter setting)

```
sw_checklist:=1;
** default : sw_checklist=0
```

(Command line)

```
>mpost -s ahandle=0 -s ahandle=2 FILENAME (molecular definition file)
```

(Output)

```
%-----
% Molecular name = Caffeine
% Warnings = 0 / Expanded command = 75
% Width * Height = 39.5496 * 36.85023
% Shift width * height = -9.33653 * -12.77606
% Bond length = 9.23695 Atom size = 4.12231
% Atom count= 14 Bond count= 15 Ring count= 2 Hide H count= 10
%-----
%< NO. >< x axis , y axis >< atom >< bond >< hide_H >
% A1 ( 0 , 0 ) C 4
% A2 ( 0.866 , -0.5 ) N 3
% A3 ( 1.732 , 0 ) C 4
% A4 ( 1.732 , 1 ) C 4
% A5 ( 0.866 , 1.5 ) C 4
% A6 ( 0 , 1 ) N 3
% A7 ( 2.683 , -0.309 ) N 3
% A8 ( 3.271 , 0.5 ) C 3 1
% A9 ( 2.683 , 1.309 ) N 3
% A10 ( 0.866 , -1.383 ) C 1 3
% A11 ( -0.788 , 1.455 ) C 1 3
% A12 ( 2.959 , 2.159 ) C 1 3
% A13 ( -0.788 , -0.455 ) O 2
% A14 ( 0.866 , 2.383 ) O 2
%-----
%< NO. >< bond (sdt)><angle + ( +- )><length ( pt )>
% B1 1 -> 2 ( 1 ) 330 ( -30 ) 1 ( 9.24 )
% B2 2 -> 3 ( 1 ) 30 ( 30 ) 1 ( 9.24 )
% B3 3 -> 4 ( 2 ) 90 ( 90 ) 1 ( 9.24 )
% B4 4 -> 5 ( 1 ) 150 ( 150 ) 1 ( 9.24 )
% B5 5 -> 6 ( 1 ) 210 ( -150 ) 1 ( 9.24 )
% B6 6 -> 1 ( 1 ) 270 ( -90 ) 1 ( 9.24 )
% B7 3 -> 7 ( 1 ) 342 ( -18 ) 1 ( 9.24 )
% B8 7 -> 8 ( 2 ) 54 ( 54 ) 1 ( 9.24 )
% B9 8 -> 9 ( 1 ) 126 ( 126 ) 1 ( 9.24 )
% B10 9 -> 4 ( 1 ) 198 ( -162 ) 0.66 ( 6.1 )
% B11 2 -> 10 ( 1 ) 270 ( -90 ) 0.66 ( 6.1 )
% B12 6 -> 11 ( 1 ) 150 ( 150 ) 0.66 ( 6.1 )
% B13 9 -> 12 ( 1 ) 72 ( 72 ) 0.66 ( 6.1 )
% B14 1 -> 13 ( 2 ) 210 ( -150 ) 0.66 ( 6.1 )
% B15 5 -> 14 ( 2 ) 90 ( 90 ) 0.66 ( 6.1 )
%-----
% C ( 12.0107 ) * 8 = 96.08557
% H ( 1.00793 ) * 10 = 10.07935
% N ( 14.0067 ) * 4 = 56.0268
% O ( 15.9994 ) * 2 = 31.99881
% Weight Calc: 194.19052 / Input: 194.19 / weight gap= 0.00052
% Formula Calc: C8H10N4O2 / Input: C8H10N4O2 / MACTCH
%=====
```

7.4 Molfile output

(Insert option parameter setting)

```
sw_MOLout:=1;  
** default : sw_MOLout=0
```

(Command line)

```
>mpost -s ahandle=3  FILENAME (molecular definition file)
```

(Output)

```
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%  
-MCFtoMOL- EN:Caffeine  
  
14 15  0  0  0  0  0  0  0  0999 V2000  
      0      0      0 C  0  0  0  0  
0.86603     -0.5      0 N  0  0  0  0  
1.73206      0      0 C  0  0  0  0  
1.73206      1      0 C  0  0  0  0  
0.86603     1.5      0 C  0  0  0  0  
      0      1      0 N  0  0  0  0  
2.6831    -0.30902    0 N  0  0  0  0  
3.27089      0.5      0 C  0  0  0  0  
2.6831     1.30902    0 N  0  0  0  0  
0.86603    -1.36383    0 C  0  0  0  0  
-0.76894     1.44394    0 C  0  0  0  0  
-0.76894    -0.44394    0 O  0  0  0  0  
0.86603     2.36383    0 O  0  0  0  0  
2.95299     2.1396     0 C  0  0  0  0  
1  2  1  0      0  0  
2  3  1  0      0  0  
3  4  2  0      0  0  
4  5  1  0      0  0  
5  6  1  0      0  0  
6  1  1  0      0  0  
3  7  1  0      0  0  
7  8  2  0      0  0  
8  9  1  0      0  0  
9  4  1  0      0  0  
2 10  1  0      0  0  
6 11  1  0      0  0  
1 12  2  0      0  0  
5 13  2  0      0  0  
9 14  1  0      0  0  
M  END  
%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
```


7.5 LuaTeX file example


```
%-----
\documentclass{article}
\usepackage{luamplib}%
\mplibcodeinherit{enable}%
\mplibverbatim{enable}%
\everymplib{if unknown Ph1:
    input mcf2graph.mf;
    mp_log_name:="temp-info.aux";
    sw_auxout:=1;
fi}%
%-----
\begin{document}
\noindent%
%-----
\begin{mplibcode}
font_wd:=50mm; font_ht:=50mm;
beginfont("N0:2","EN:Limonin","MW:470.51")
Mcf(<30,
    ?6,$(-3,-4)?6,
    -5=?3,-2=wf,-1=wb,6=?5,-4=?6,-5=wf,
    @(13,15,17,20)0,@(3,12,21)//0,
    @(4~wf^60,8~zf^60,18^35,18^-35)/_,
    @(1^60,5^180,16^60)*H,
    14\*,|,?5,$(1,4)d1,3:0
)
endfont
\end{mplibcode}\\
%-----
\begin{mplibcode}
font_wd:=80mm; font_ht:=50mm;
beginfont("N0:3","EN:beta-carotene","MW:536.87")
Mcf(<30,
    ?6,3=d1,@(3,5^35,5^-35)/_,
    4\*,|,!18,$(1,3,5,7,9,11,13,15,17)dr,
    @(3,7,12,16)/_,
    |,?6,6=d1,@(6,2^35,2^-35)/_
)
endfont
\end{mplibcode}\\
%-----
\begin{mplibcode}
font_wd:=50mm; font_ht:=50mm;
beginfont("N0:4","EN:Gibberellin A3","MW:346.37");
Mcf(<18,?5,3=?7,5=?6[12],
    8*,160'1.3,&3,13=d1,6=wf,8=wb,
    5*,40~zf'1,0,60,//0^180,&14~zb,
    2:/COOH,7://_,13:*/OH,8:/*OH,
    14:*/_,@(1^60,4^60)*H
)
endfont;
\end{mplibcode}\\
%-----
\end{document}
%-----
```

7.6 LaTeX file example

```
%-----
\documentclass[a4paper]{article}
\usepackage{graphicx}
\pagestyle{empty}
\makeatletter%
%-----
\def\@F{F}\def\@C{C}\def\@EN{EN}\def\@NO{NO}\def\@MW{MW}\def\@FMc{FMc}%
\def\@fst@param#1:#2;{#1}\def\@sec@param#1:#2;{#2}%
\def\mol@sel#1{%
\if#1empty\relax\else%
\edef\@tag{\expandafter\@fst@param#1;}%
\edef\@var{\expandafter\@sec@param#1;}%
\ifx\@tag\@F\edef\MOLfile{\@var}\fi%
\ifx\@tag\@C\edef\MOLchar{\@var}\fi%
\ifx\@tag\@EN\edef\MOLnameE{\@var}\fi%
\ifx\@tag\@NO\edef\MOLnum{\@var}\fi%
\ifx\@tag\@MW\edef\CALmw{\@var}\fi%
\ifx\@tag\@FMc\edef\CALfm{\@var}\fi%
\fi}%
\def\put@char{%
\begin{picture}(84,42)%
\put(0,38){\bf [MOLnum]\MOLnameE{ }\small\tt/FM:\CALfm/MW:\CALmw}%
\put(10,0){\font\@strufont=\MOLfile\relax%
\hbox{\@strufont\char\MOLchar}}%
\end{picture}%
\def\INFO#1{\@for\@temp:=#1\do{\mol@sel\@temp}\put@char}%
\makeatother
%-----
\begin{document}
\unitlength=1mm%
\INFO{F:mcf_man_soc,C:115,NO:1,cMW:349.40462,cFM:C16H19N3O4S,EN:Ampicillin}%
\INFO{F:mcf_man_soc,C:116,NO:2,cMW:386.6532,cFM:C27H46O,EN:Cholesterol}%
\end{document}
%-----
```

[1]Ampicillin

FM:C16H19N3O4S MW:349.40462



[2]Cholesterol

FM:C27H46O MW:386.6532

